


MIL-DTL-38999 Series III

manufactured in Germany
Saarlouis

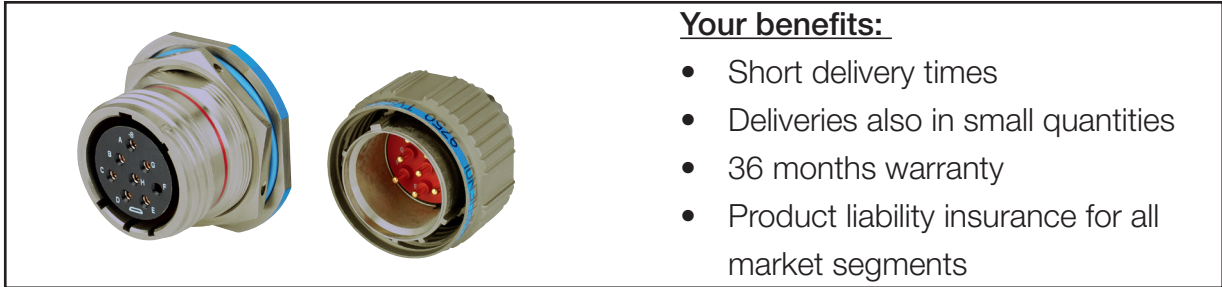

Your benefits:


- Short delivery times
- Deliveries also in small quantities
- 36 months warranty
- Product liability insurance for all market segments

Protective caps for plugs and sockets



Our metal protective caps for plugs and sockets are available in all versions and variants. They are available with different strings in different lengths.

Conductive and non conductive seals according to VG96940-6

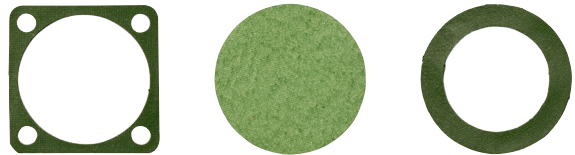

Seals for square flange sockets for installation type front wall and back wall, seals for sockets with single hole mounts, seals for protective caps

- Temperature range: from -55°C to 160°C
- Frequency range: 15KHz to 4GHz
- Shielding properties at ≥ 80 dB

Backshells according to MIL-C-85049 and VG95319-1011



Backshell as adapter with strain reliever shells for MIL-DTL-38999 series III. The backshells are available in various versions, straight or bent as tape adapters, individual cone adapters or mold adapters.

- Temperature range corresponds to the respective plug series
- Conversion to VG95319-1011: [HERE](#)

High Speed and Fiber Optics contacts



We deliver:

- High-speed contacts for MIL-DTL-38999: Coax, Concentric Twinax, Triax, Differential Twinax, Star Quadax, Split Pair Quadax.
- Contacts for PBCs
- Lumière contact and others on request